




Floor Warming Cable System

Tile & Stone Over Double Layer Plywood

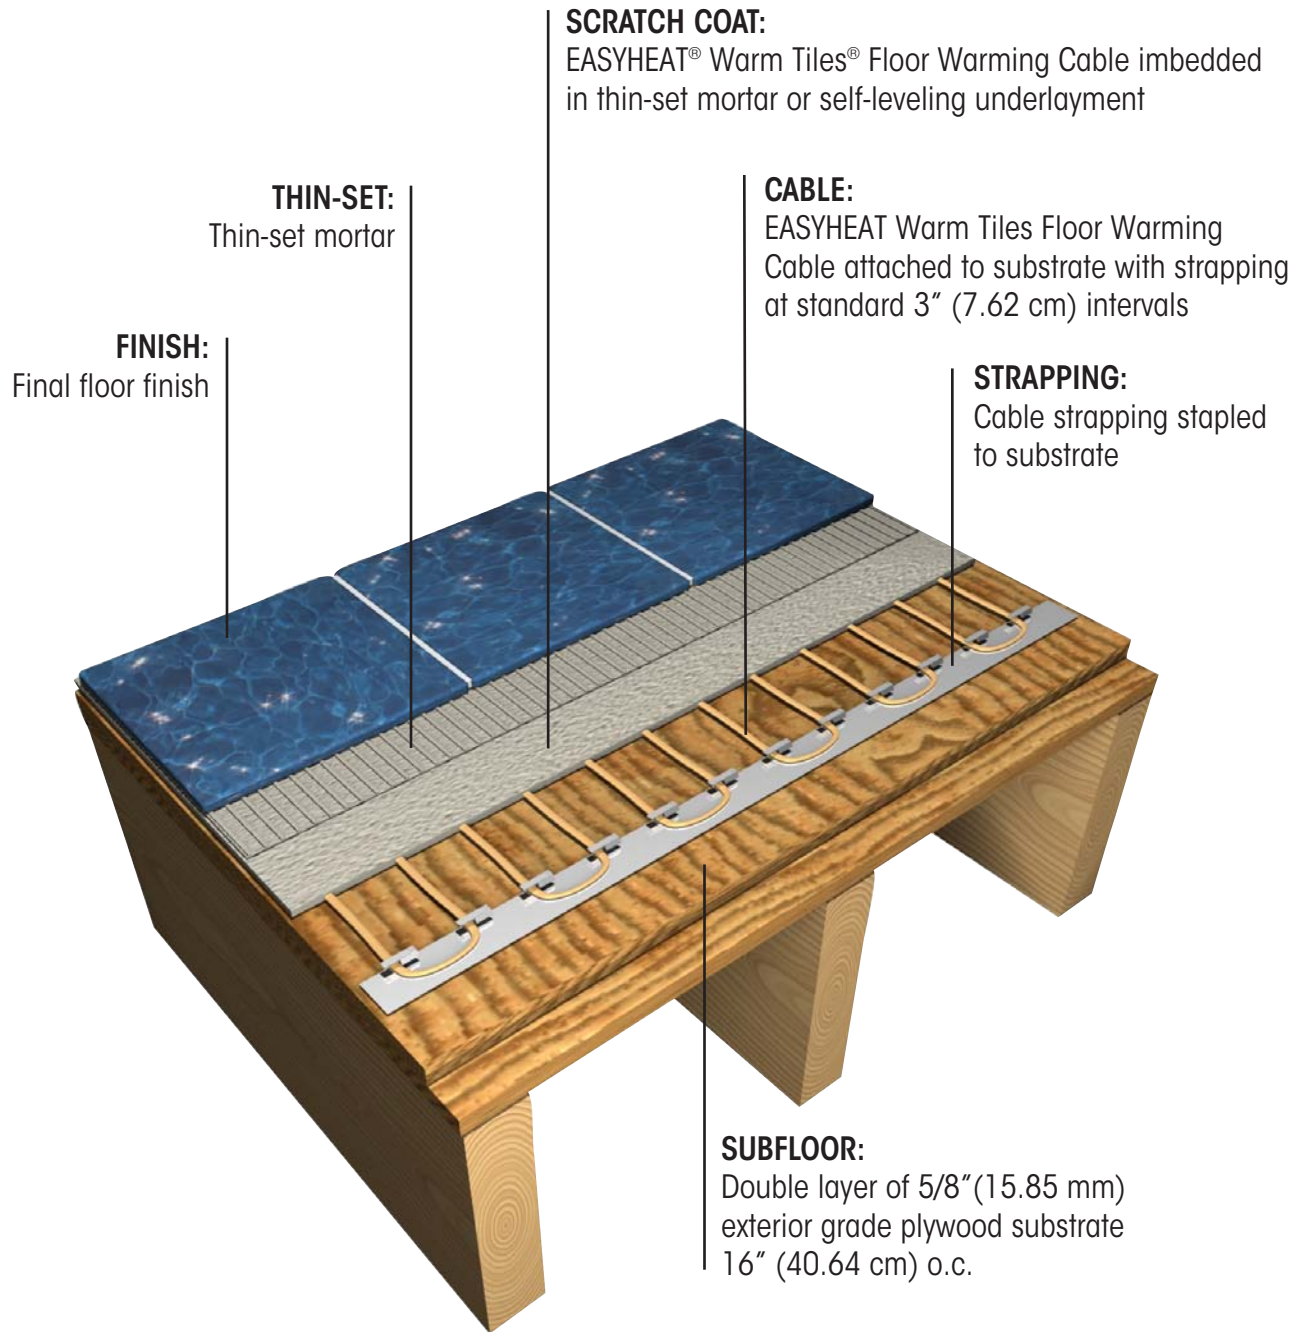

FINISH:
Final floor finish

THIN-SET:
Thin-set mortar

SCRATCH COAT:

EASYHEAT® Warm Tiles® Floor Warming Cable imbedded in thin-set mortar or self-leveling underlayment

CABLE:

EASYHEAT Warm Tiles Floor Warming Cable attached to substrate with strapping at standard 3" (7.62 cm) intervals

STRAPPING:

Cable strapping stapled to substrate

SUBFLOOR:

Double layer of 5/8" (15.85 mm) exterior grade plywood substrate 16" (40.64 cm) o.c.

EASYHEAT®
Warming Your World

www.warmtiles.com